




## PC-ESD

# FDM Thermoplastic Filament

The information presented are typical values intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes.

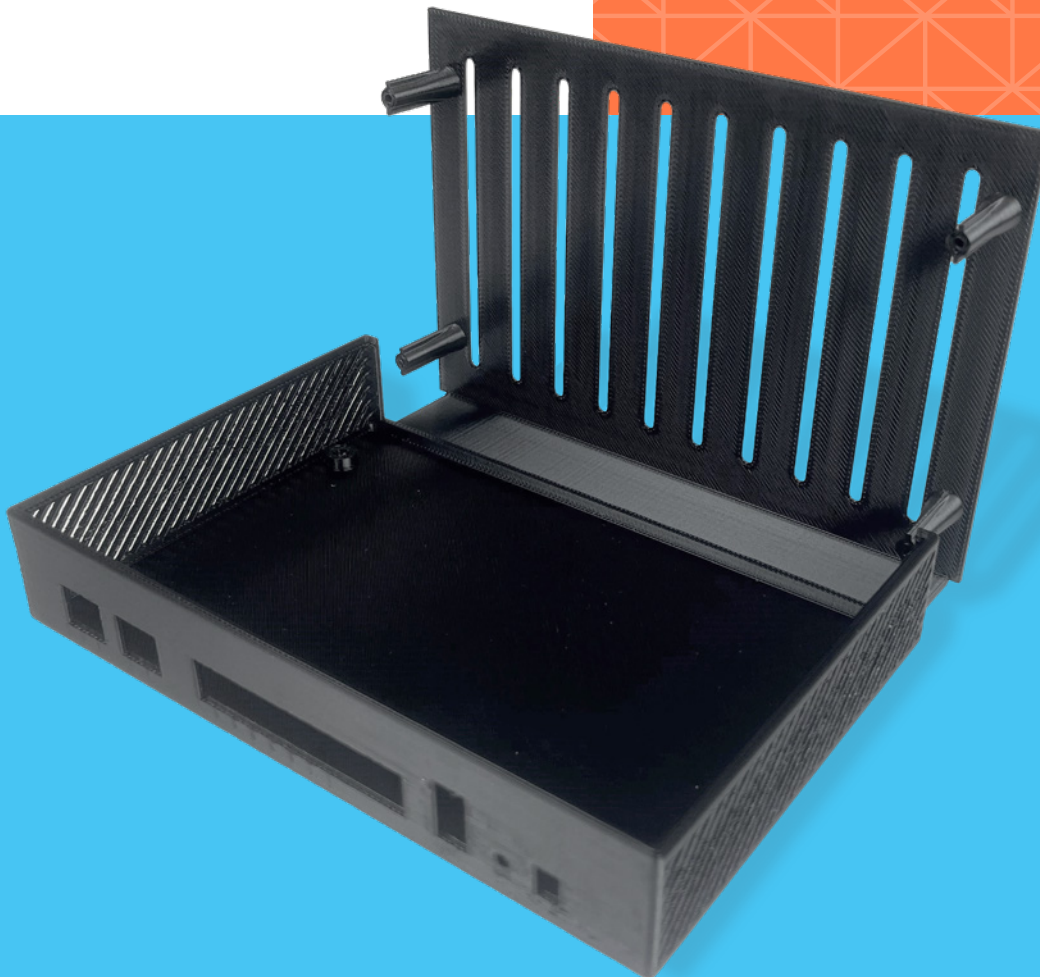



## Overview

FDM® PC-ESD is a polycarbonate (PC) based material formulated to provide consistent electrostatic discharge (ESD) performance across different geometries. PC-ESD is a strong, durable, ESD material with a higher allowable usage temperature, excellent mechanical properties, and good chemical resistance. This makes it an excellent material for printed circuit board (PCB) production, electronic manufacturing, and electronic assembly applications.

## Contents:

Overview .....	2
System Requirements .....	3
Ordering Information .....	3
Physical Properties .....	4
Mechanical Properties.....	5



## System Requirements

**Table 1: Printer and Support Material Compatibility**

Printer	Model Tip	Layer Height	Support Material	Support Tip
Fortus 450mc™	T16	0.254 mm (0.010 in.)	SR-100™	T12SR100
F900®	T16	0.254 mm (0.010 in.)	SR-100	T12SR100

### Build Sheet

#### Low Temperature

- 0.51 x 406 x 470 mm (0.02 x 16 x 18.5 in.)
- 0.51 x 660 x 695 mm (0.02 x 26 x 38 in.)

### System Requirements

#### Fortus 450mc

- Hardened machine upgrade
- Hardened Fortus 450mc head
- All-materials license or equivalent (included if new system)

#### F900

- Standard F900 head
- Validated-materials license

## Ordering Information

**Table 2: PC-ESD Ordering Information**

Part Number	Description
<b>Filament Canisters</b>	
355-70100	PC-ESD, 92 cu in. - Plus
355-03120	SR-100, 92 cu in. - Plus
<b>Printer Consumables</b>	
511-10401	T16 tip
511-10100	T12SR100 tip
325-00100	Low Temperature build sheet 0.51 x 406 x 470 mm (0.02 x 16 x 18.5 in.)
325-00300	Low Temperature build sheet 0.51 x 660 x 695 mm (0.02 x 26 x 38 in.)
<b>Print Heads</b>	
821726-XXXX	Hardened Fortus 450mc head (blue handle)
404210-XXXX	Standard F900 head (formed rod handle)



## Physical Properties

Values are measured as printed in the XY, XZ, and ZX orientations. Additional testing was done on molded parts and the filament itself. For full details refer to the [Stratasys Materials Test Procedure](#).

**Table 3: PC-ESD Physical Properties**

Property	Test Method	Typical Values		
		XY	XZ	ZX
<b>Physical Properties - Printed</b>				
HDT @ 66 psi	ASTM D648 Method B	145 °C (293 °F)	146 °C (295 °F)	143 °C (289 °F)
HDT @ 264 psi	ASTM D648 Method B	144 °C (291 °F)	144 °C (291 °F)	140 °C (284 °F)
Volume Resistivity Top	ASTM D257	3.5*10 <sup>7</sup> Ω*cm	-	-
Volume Resistivity Bottom	ASTM D257	3.5*10 <sup>7</sup> Ω*cm	-	-
Surface Resistivity Top	ASTM D257	3.9*10 <sup>4</sup> Ω*cm	-	-
Surface Resistivity Bottom	ASTM D257	2.0*10 <sup>7</sup> Ω*cm	-	-
Volume Resistance Top	ASTM D257	1.3*10 <sup>6</sup> Ω	-	-
Volume Resistance Bottom	ASTM D257	1.3*10 <sup>6</sup> Ω	-	-
Surface Resistance Top	ASTM D257	3.9*10 <sup>3</sup> Ω	-	-
Surface Resistance Bottom	ASTM D257	2.0*10 <sup>6</sup> Ω	-	-
<b>Physical Properties - Non-Printed</b>				
Tg	ASTM D7426 Inflection Point		142 °C (288 °F)	
Specific Gravity	ASTM D792 @23 °C		1.195 g/cc	
Molded HDT @ 66 psi	ASTM D648 Method B		135 °C (275 °F)	
Molded HDT @ 264 psi	ASTM D648 Method B		124 °C (255 °F)	



## Mechanical Properties

Samples were printed with 0.245 mm (0.010 in.) layer heights on the Fortus 450mc and F900 with a T16 tip. For the full test procedure please see [Stratasys Materials Test Procedure](#).


**Table 4: PC-ESD Mechanical Properties – Fortus 450mc – T16 Tip and SR-100 Support**

0.254 mm (0.010 in.) Layer Height		XZ Orientation <sup>1</sup>	ZX Orientation <sup>1</sup>
<b>Tensile Properties: ASTM D638</b>			
<b>Yield Strength</b>	MPa	47.6 (0.59)	32.5 (3.3)
	psi	6900 (86)	4710 (480)
<b>Elongation @ Yield</b>	%	3.8 (0.064)	2 (0.24)
<b>Strength @ Break</b>	MPa	47.1 (0.8)	32.5 (3.3)
	psi	6830 (120)	4710 (470)
<b>Elongation @ Break</b>	%	3.9 (0.17)	2 (0.23)
<b>Modulus (Elastic)</b>	GPa	1.96 (0.025)	1.91 (0.041)
	ksi	285 (3.6)	277 (6)
<b>Flexural Properties: ASTM D790, Procedure A</b>			
<b>Strength @ Break</b>	MPa	82.6 (2.2)	46.3 (6.7)
	psi	12000 (320)	6710 (970)
<b>Strain @ Break</b>	%	-	2.8 (0.5)
<b>Modulus</b>	GPa	2.19 (0.05)	1.7 (0.061)
	ksi	317 (7.3)	247 (8.9)
<b>Impact Properties: ASTM D256, ASTM D4812</b>			
<b>Notched</b>	J/m	194 (19)	21.2 (3.7)
	ft*lb/in.	3.63 (0.35)	0.397 (0.07)
<b>Unnotched</b>	J/m	994 (140)	166 (35)
	ft*lb/in.	18.6 (2.7)	3.11 (0.66)

<sup>1</sup> Values in parenthesis are standard deviations.

**Table 5: PC-ESD Mechanical Properties – F900 – T16 Tip and SR-100 Support**

0.254 mm (0.010 in.) Layer Height		XZ Orientation <sup>1</sup>	ZX Orientation <sup>1</sup>
<b>Tensile Properties: ASTM D638</b>			
<b>Yield Strength</b>	MPa	49.4 (0.89)	37.9 (2.3)
	psi	7160 (130)	5500 (340)
<b>Elongation @ Yield</b>	%	4.6 (0.072)	2.7 (0.22)
<b>Strength @ Break</b>	MPa	47.7 (1.4)	38 (2.4)
	psi	6910 (200)	5510 (350)
<b>Elongation @ Break</b>	%	5.2 (0.38)	2.7 (0.23)
<b>Modulus (Elastic)</b>	GPa	1.96 (0.025)	1.81 (0.023)
	ksi	285 (3.6)	263 (3.3)
<b>Flexural Properties: ASTM D790, Procedure A</b>			
<b>Strength @ Break</b>	MPa	83.2 (2.5)	49.5 (5.4)
	psi	12100 (360)	7190 (780)
<b>Strain @ Break</b>	%	-	3.1 (0.42)
<b>Modulus</b>	GPa	2.17 (0.048)	1.69 (0.052)
	ksi	314 (7)	245 (7.5)
<b>Impact Properties: ASTM D256, ASTM D4812</b>			
<b>Notched</b>	J/m	233 (15)	23.1 (2.6)
	ft*lb/in.	4.37 (0.29)	0.433 (0.049)
<b>Unnotched</b>	J/m	1390 (120)	151 (38)
	ft*lb/in.	26 (2.3)	2.82 (0.71)

<sup>1</sup> Values in parenthesis are standard deviations.

alphacam GmbH  
Erlenwiesen 16  
D-73614 Schorndorf  
Tel.: +49 7181 9222-0  
info@alphacam.de

alphacam austria GmbH  
Handelskai 92, Gate1 / 2. OG / Top A  
A-1200 Wien  
Tel.: +43 1 3619 600-0  
info@alphacam.at

alphacam swiss GmbH  
Zürcherstrasse 14  
CH-8400 Winterthur  
Tel.: +41 52 26207-50  
info@alphacam.ch

alphacam.de

.at

.ch

[stratasys.com](https://stratasys.com)

ISO 9001:2015

Certified

**MATERIAL DATA SHEET**  
FDM

© 2024 Stratasys. All rights reserved. Stratasys, the Stratasys Signet logo, F900, and FDM are registered trademarks of Stratasys Inc. Fortus 450mc and SR-100 are trademarks of Stratasys, Inc. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance, or use of these non-Stratasys products. Product specifications subject to change without notice. MDS\_FDM\_PC-ESD\_A4\_1024a