


PP

Polypropylene

Overview

The SAF PP is the first real polypropylene additive manufacturing solution in PBF: Superior aesthetics, best accuracy, fastest, most cost-effective, for chemically resistant and airtight applications.

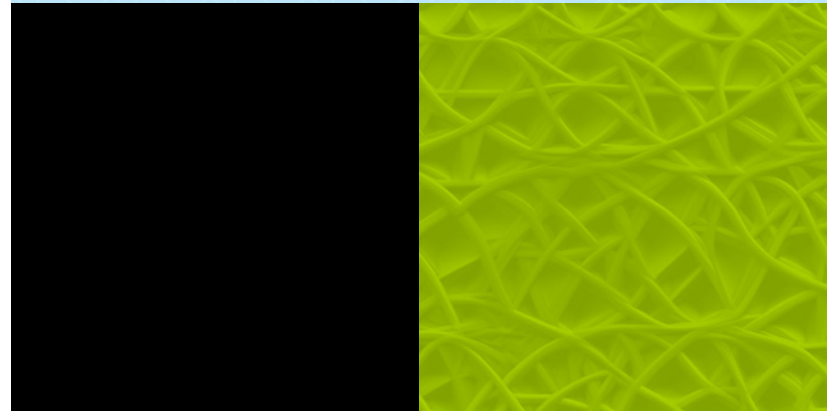



	Mean	Unit	Standard
Tensile Strength (XZ,YX)	26 (3740)	MPa (psi)	ASTM D638-14
Tensile Strength (ZX)	26 (3740)	MPa (psi)	ASTM D638-14
Elongation at Break (XZ,YX)	22	%	ASTM D638-14
Elongation at Break (ZX)	11	%	ASTM D638-14
0.2% Offset Yield Strength (XZ,YX)	12.5 (1810)	MPa (psi)	ASTM D638-14
0.2% Offset Yield Strength (ZX)	12.7 (1840)	MPa (psi)	ASTM D638-14
Tensile Modulus (XZ,YX)	1260 (183)	MPa (ksi)	ASTM D638-14
Tensile Modulus (ZX)	1212 (176)	MPa (ksi)	ASTM D638-14
Flexural Strength (XZ)	28 (4050)	MPa (psi)	ASTM D790-17
Flexural Strength (YX)	25 (3570)	MPa (psi)	ASTM D790-17
Flexural Strength (ZX)	30 (4290)	MPa (psi)	ASTM D790-17
Flexural Modulus (XZ)	992 (144)	MPa (ksi)	ASTM D790-17
Flexural Modulus (YX)	870 (126)	MPa (ksi)	ASTM D790-17
Flexural Modulus (ZX)	1119 (162)	MPa (ksi)	ASTM D790-17
Notched Impact Strength (XZ,YX)	3.5 (1.67)	kJ/m2 (Ft.lbf/in2)	ASTM D256-10
Notched Impact Strength (ZX)	2.5 (1.19)	kJ/m2 (Ft.lbf/in2)	ASTM D256-10
General	Mean	Unit	Standard
Part Specific Gravity	0.89	-	ASTM D792-13
Virgin Particle Size D50	60-70 (2.36-2.76)	µm (thou)	
Virgin Powder Melting Point	140 (284)	°C (°F)	



Thermal	Mean	Unit	Standard
Heat Deflection Temperature (0.46MPa/65psi)	107 (225)	°C (°F)	ASTM D648-18
Heat Deflection Temperature (1.82MPa/264psi)	56 (132)	°C (°F)	ASTM D648-18
Coefficient of Thermal Expansion	169 (94)	µm/°C.m (thou/in.°F)	ASTM E831-19
Specific Heat Capacity (20°C/68°F)	1.76 (0.4)	J/g.°C (BTU/lb.°F)	ASTM E1269-11
Thermal Conductivity (23°C/73°F)	0.196 (1.36)	W/m K (BTU (th) inch/hr.ft.°F)	ASTM C518

Electrical	Mean	Unit	Standard
Surface Resistivity	5.24 x10 ¹⁵	Ohm/square	ASTM D257-14
Volume Resistivity	7.39 x10 ¹⁵	Ohm-cm	ASTM D257-14

Bio compatibility	Result	Unit	Standard
Determination of Skin Irritation	Non-irritant	N/A	ISO 10993-10 2014-10 / OECD 439 2015-07
Determination of Cytotoxicity	Material shows no cytotoxic effect	N/A	DIN EN ISO 10993-5, 2009, Annex D

Flammability		Unit	Standard
UL94 HB (3.24mm at 23+-2°C/50+-10% RH) ⁹	Pass	Not Applicable	UL94 (April 2022)

Disclaimer:

- Customer acknowledges the contents of this document and that Stratasys parts, materials, and supplier are subject to its standard terms and conditions, available on <http://www.stratasys.com/legal/terms-and-conditions-of-sale>, which are incorporated herein by reference.
- The specifications and/or information on which this document is based are subject to change without notice.
- Product is not currently UL Blue Card Registered.
- The information presented are typical values intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. End-use material performance can be impacted (+/-) by, but not limited to, part design, end-use conditions, test conditions, etc. Actual values will vary with build conditions. Tested parts were built on the Stratasys H350 3D printer. Product specifications are subject to change without notice. The performance characteristics of these materials may vary according to application, operating conditions, or end use. Each user is responsible for determining that the Stratasys material is safe, lawful, and technically suitable for the intended application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations. Stratasys makes no warranties of any kind, express or implied, including, but not limited to, the warranties of merchantability, fitness for a particular use, or warranty against patent infringement.



alphacam GmbH
Erlenwiesen 16
D-73614 Schorndorf
Tel.: +49 7181 9222-0
info@alphacam.de

alphacam austria GmbH
Handelskai 92, Gate 1 / 2. OG / Top A
A-1200 Wien
Tel.: +43 1 3619 600-0
info@alphacam.at

alphacam swiss GmbH
Zürcherstrasse 14
CH-8400 Winterthur
Tel.: +41 52 26207-50
info@alphacam.ch



alphacam.de
.at
.ch

stratasys.com

ISO 9001:2015
Certified



MATERIAL DATA SHEET
SAF PP

© 2024 Stratasys. All rights reserved. Stratasys, the Stratasys Signet logo, H350, and SAF are trademarks or registered trademarks of Stratasys Inc. and/or its affiliates. The H350 printer is subject to a license from Loughborough University Enterprises Limited and Evonik IP GmbH under the following and/or related patents and patent applications and their family members: EP2739457, EP3539752, EP1648686, EP 1740367, EP1737646, EP1459871. Further details including live and in-force status of family members may be found at <https://worldwide.espacenet.com/patent/search/family/>. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance, or use of these non Stratasys products. Product specifications subject to change without notice. MDS_SAF_PP_0624a